

## High Speed InGaAs Photodiode

### Features

- Low capacitance and high speed with a PIN structure
- Low dark current
- Low voltage operation
- High reliability
- Pigtail type is available as an option

*Package drawings are seen in datasheet of 'Package Option for KPDE, KPDG, KPID Series.'*

### Applications

- Digital and analog optical communication
- Optical LAN
- OTDR

### Specifications

#### Absolute Maximum Ratings


Parameter	Symbol	Value	Unit
Reverse voltage	$V_R$	20	V
Maximum optical power input	$P_{i\ max}$	10	mW
Forward current	$I_F$	10	mA
Operating temperature	$T_{opr}$	-40 to +85	°C
Storage temperature	$T_{stg}$	-40 to +85	°C

#### Electrical and Optical characteristics (Ta=25°C unless otherwise noted)


Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Active diameter	D	80			μm	
Bandwidth	BW	1.0	2.0		GHz	$P_i=-10\text{dBm}$ , small signal modulation, $V_R=5\text{V}$
Responsivity	R	0.8	0.9		A/W	$\lambda=1310\text{nm}$ , $V_R=5\text{V}$
		0.9	1.0			$\lambda=1550\text{nm}$ , $V_R=5\text{V}$
Dark current	$I_D$		30	160	pA	$V_R=5\text{V}$
Chip capacitance	$C_{chip}$		0.65	0.80	pF	$V_R=5\text{V}$ , $f=1\text{MHz}$
Total capacitance	$C_t$		0.95	1.10	pF	$V_R=5\text{V}$ , $f=1\text{MHz}$
Responsivity uniformity	$\Delta R$			0.5	dB	$\lambda=1530-1610\text{nm}$ $T_{opr}=-10\text{ to }+85^\circ\text{C}$

Specifications are subject to change without notice.


**Spectral Responsivity**

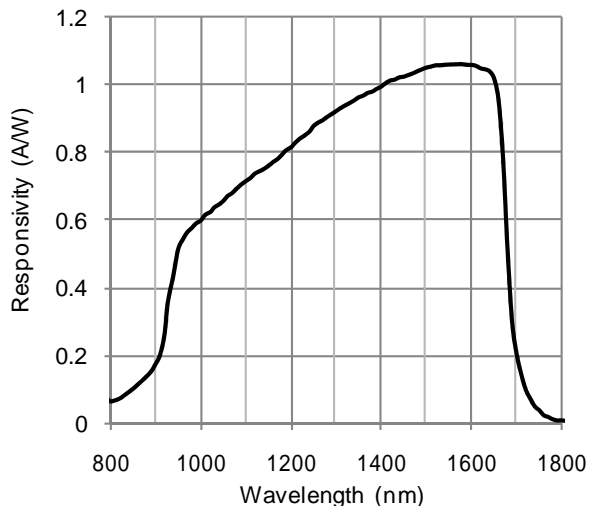


**Uniformity of spectral responsivity**

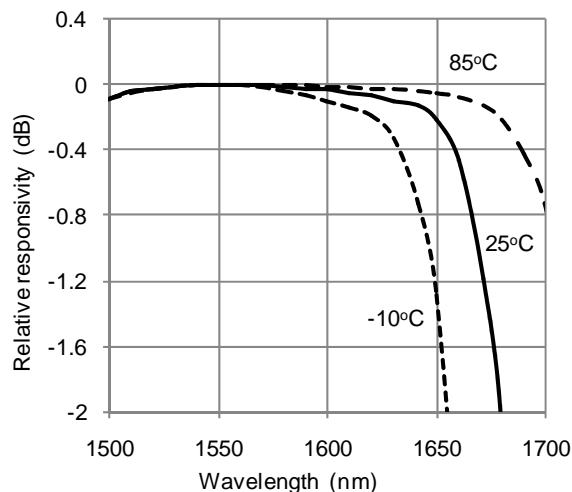


**Frequency response**

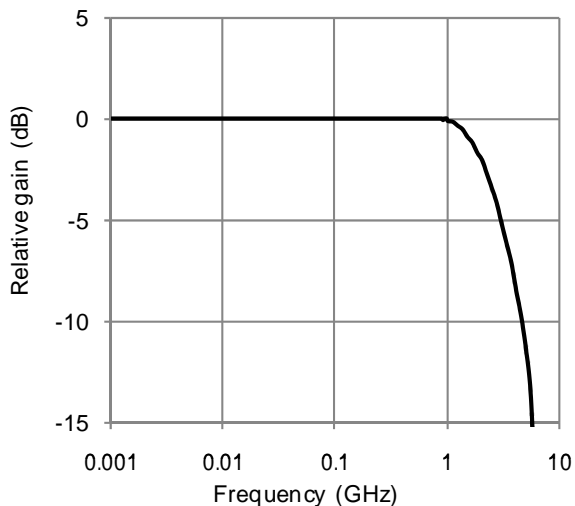


**C-V characteristics**

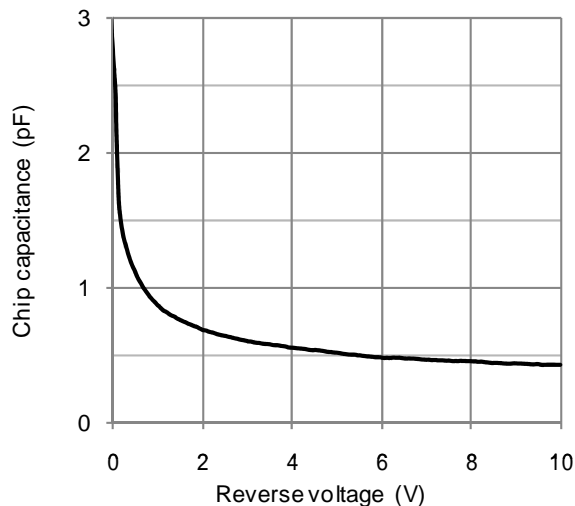

**Dark current - ambient temperature**

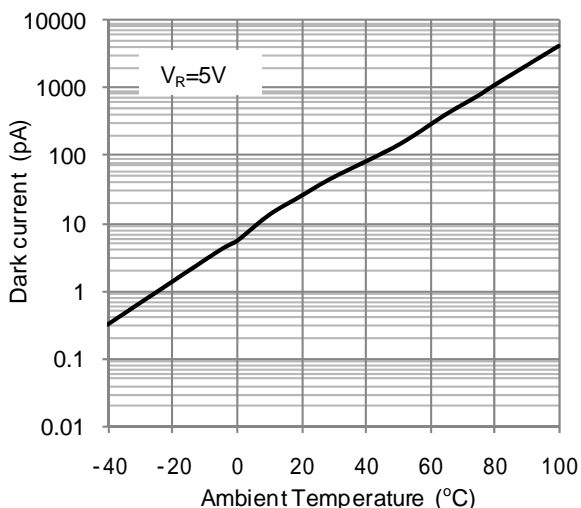

**Dark current - reverse voltage**

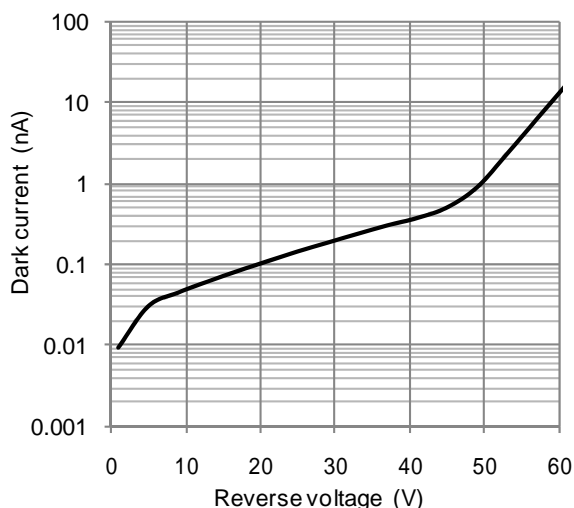

Specifications are subject to change without notice.

**Contacts:**

[www.kyosemi.co.jp](http://www.kyosemi.co.jp) / [info@kyosemi.co.jp](mailto:info@kyosemi.co.jp)

**Kansai Sales Office:** 949-2 Ebisu-cho, Fushimi-ku, Kyoto, 612-8201 Japan Tel: +81 75 605 7311 Fax: +81 75 605 7312 (Overseas Sales Dept.)  
**Tokyo Sales Office:** 24th Sky Building, 2nd Floor, 1-34-3 Shinjuku, Shinjuku-ku, Tokyo 160-0022 Japan Tel: +81 3 5312 5360 Fax: +81 3 5312 5367  
**Eniwa Operation:** 385-31 Toiso, Eniwa-shi, Hokkaido 061-1405 Japan Tel: +81 123 34 3111 Fax: +81 123 34 2110  
**Kyosemi Opto America Corp:** 3003 Bunker Hill Lane, Suite 102, Santa Clara, CA 95054 USA Tel: +1 408 492 1486 Fax: +1 408 492 9843

[www.kyosemi-opto.com](http://www.kyosemi-opto.com)